


User's Guide

Visual Fault Locator

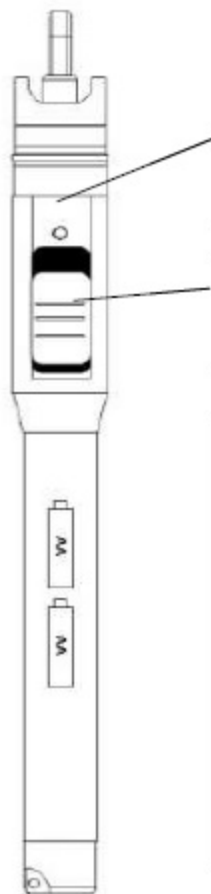

Status LED:

Green: CW mode

Flash Green: QCW mode

*LED will display red light at low battery

Modulation Button

Push once: CW mode

Push twice: QCW mode

SPECIFICATIONS

Wavelength approx. 650nm

Power output 1mW, 3mW, 5mW, 10mW

Optical Connector

Universal connector for standard 2.5mm connector systems

POWER 2AA alkaline batteries
(>15 hours battery life)

Pulse Frequency 2 to 3 HZ

Temperature range

Operation -10°C to +45°C

Storage -40°C to +70°C

Dimensions 180*15 mm

Weight approx 120g (not incl. batteries)