
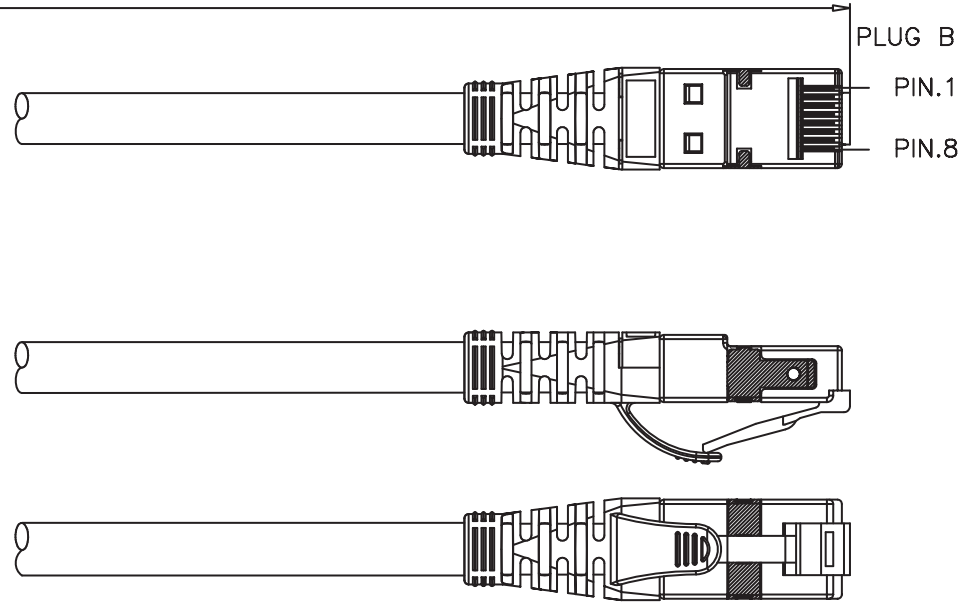


1 2 3 4 5 6

Total length (optional)

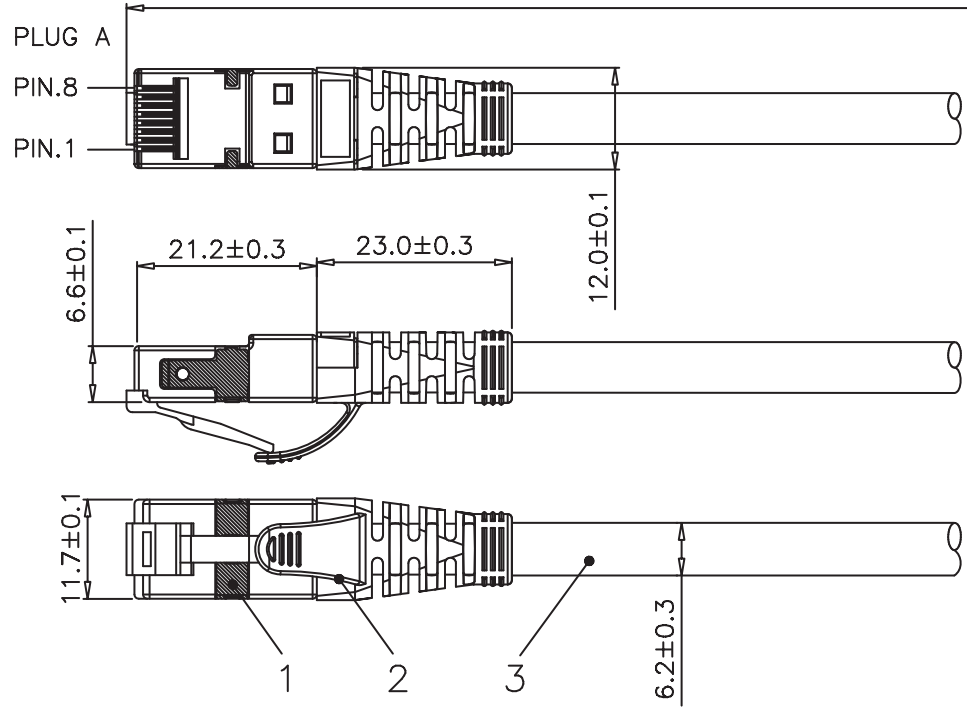

Specification :

- Material :
- RJ45 Plug :
    - Housing : Polycarbonate, UL 94V-2 Transparent color.
    - Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
    - Contact finished : Min. 50 micro-inch Gold plated.
    - Shield : Bronze with Nickel plated.
  - Cable : U-FTP Aluminum Foil Shielded for Each Twisted Pair, 4 pair Stranded wire UL material approved. 26 AWG conductor and PVC jacket.

Remark : KCP6A-UFXXX XX  
(1) (2)(3)

- XXX : Length  
50C=0.5meter, 01M=1meter, 03F=3feet.
- X : Wiring  
A=T568A, B=T568B, C=T568A & T568B combination
- X : Jacket Color  
0=Black(RAL9011), 2=Red(RAL3031), 3=Orange(RAL2003),  
4=Yellow(RAL1021), 5=Green(RAL6029), 6=Blue(RAL5015),  
7=Purple(RAL4006), 8=Gray(RAL7035), 9=White(RAL9010).

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	29.MAY.2009	LSY	<b>KUWES</b>
	CHECK	29.MAY.2009	LSY	
	APPROVAL	29.MAY.2009	NICK	
	DATE		NAME	
SCALE		1/1 (A4)	UNIT mm	DES.: C6a U/FTP Patch Card With SR type
DRAWING NO.		DRAWING CLASSIFICATION		
DRAWING CLASSIFICATION		S	SHEET	1 OF 1

1 2 3 4 5 6  
10cm